

KJT Sensors - KJT-FJP3 Series

Fiber Sensor -DC Power Supplies

KJT-FJP403-Z*XS-82V2



- Performance more steady due to specialized IC
- Though beam,diffuse reflection,L type,Window type,high-temperature type etc.
- Sensing distance Sn (mm) :0-80mm
- From diameter of ϕ 1.5mm to over M6 can be customized.
- High temperature type can be resistant high temperature of 350℃
- Provide customized service

Technical parameter


Diameter	M3
Reflection mode	Diffuse
Sensing Distance SN [mm]	0-80mm
Optical fiber material	Plastic
Minimum detection object	ϕ 0.1
The pipe material	Stainless steel
Optical fiber type	Head of optical fiber
Fiber length [m]	1m
Fiber core size	Core 0.5, outer diameter 1.0
Output	PNP/NPN

KJT Sensors - KJT-FJP3 Series


Fiber Sensor - DC Power Supplies

KJT-FJP403-Z*XS-82V2

Dimension drawing

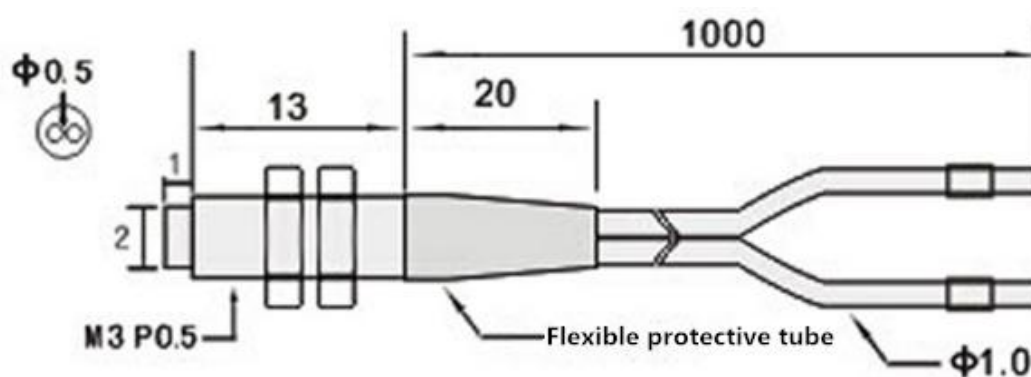

Connection diagram

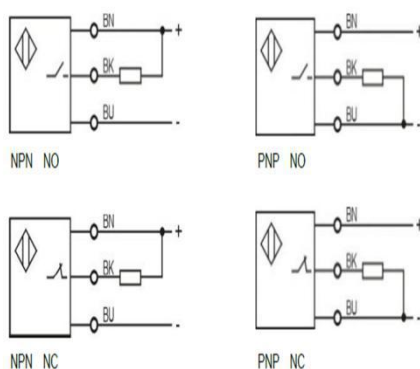

KJT Sensors - KJT-FJP3 Series

Fiber Sensor - DC Power Supplies

KJT-FJP403-Z*XS-82V2

Model/Order Number	
Sn 0-80mm DC 3 wire 10-36V PNP	KJT-FJP403-ZPXS-82V2
Sn 0-80mm DC 3 wire 10-36V NPN	KJT-FJP403-ZNXS-82V2